


Angle-Thermocouple  
Type : WST-P 12

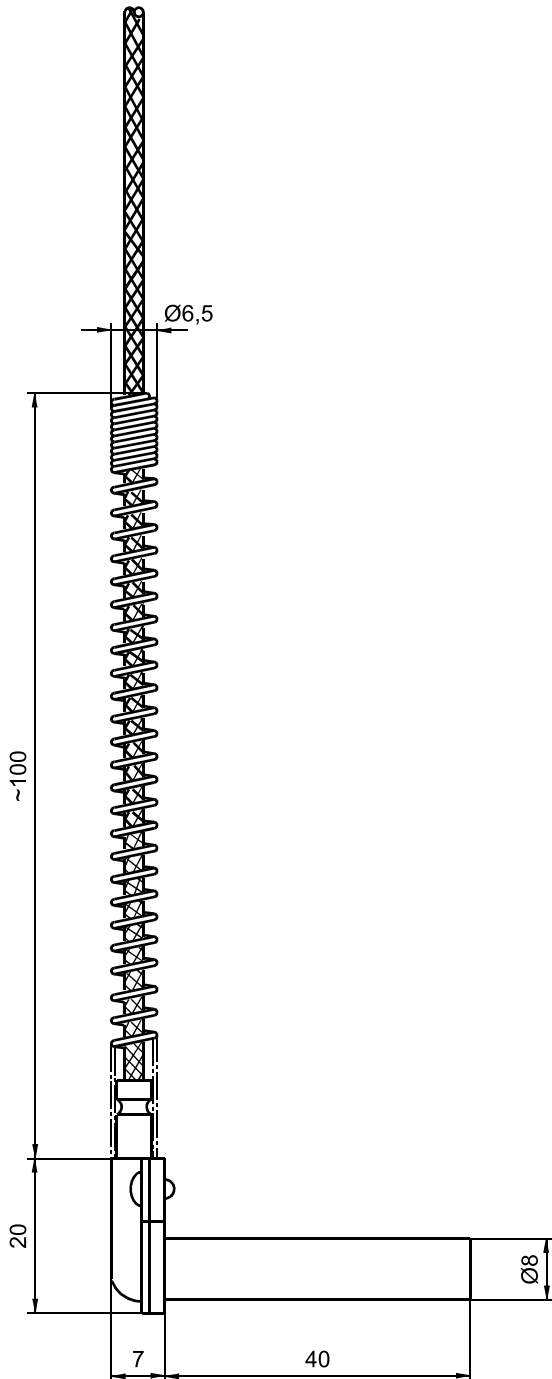

**thermoelectric voltages** : Fe-CuNi ½ DIN 43710 (L)  
Fe-CuNi DIN EN 60584, Kl. 1 (J)  
NiCr-Ni DIN EN 60584, Kl. 1 (K)

**sensor tip** : Ø 8 mm (VA)

**installation depth** : 40 mm (or to customer)

**kink protection: spring** : V2A

**control point** : soldered/ plane

**operation temperature** : to max. 400°C

**thermocouple wire** : 2 x 0,35 mm<sup>2</sup>  
fiber glass insulation  
and specially impregnated  
wire mesh from soft galvanized  
iron wires

**Other customer preferences are possible  
Subject to modifications!**

33/05